SPRINTER FUEL TANK CONNECTION WITH P/N – 22.1000.20.3000.0Z



SPRINTER FUEL TANK CONNECTION **With 22.1000.20.3000.0Z**

Eberspächer

SPRINTER FUEL TANK CONNECTION WITH P/N – 22.1000.20.3000.0Z

Step-by-step instructions:

Step 1 Cut 23 mm off from 22.1000.20.3000 ②. Also cut 45 degree angle at the end of 20.2900.20.0050 ① goes into the tank.

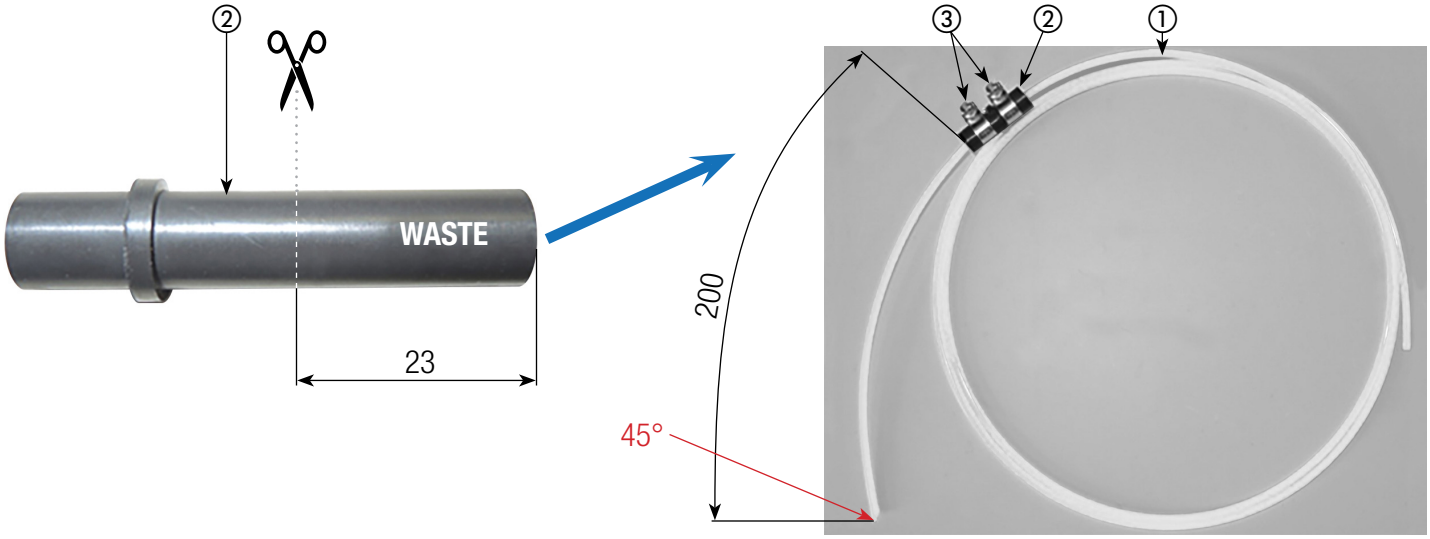

Fig.1

Step 2 Prepare the fuel line assembly according Fig 1.

① 20.2900.20.0050	**1**	Plastic Fuel Line 2mm X 2.0m
② 22.1000.20.3000	**1**	Fuel Line Adapter 7.5MM - 3.5MM
③ 10.2068.01.1098	**2**	Clamp 11mm

Step 3 Carefully cut approx. 3 mm from the connection piece of the tank fitting. ① Fig. 2. Do not crash the edge of the fitting.

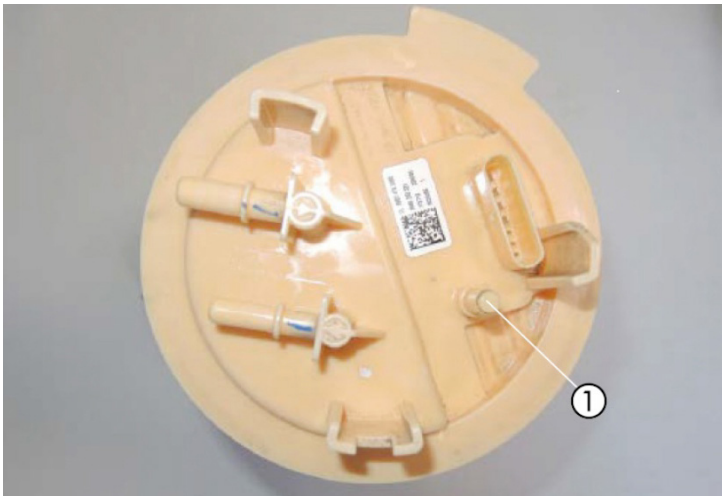

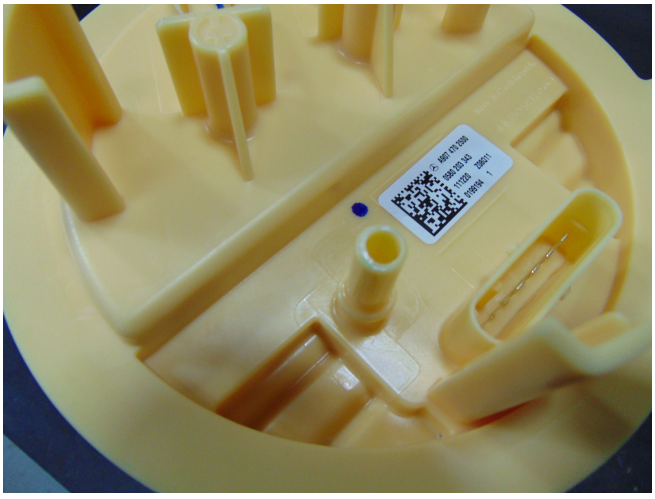

Fig. 2 ① connection piece of the tank fitting

Step 4
Guide the pre-assembled fuel pipe (suction line) through the connection piece into the tank fitting as shown in Fig.3.

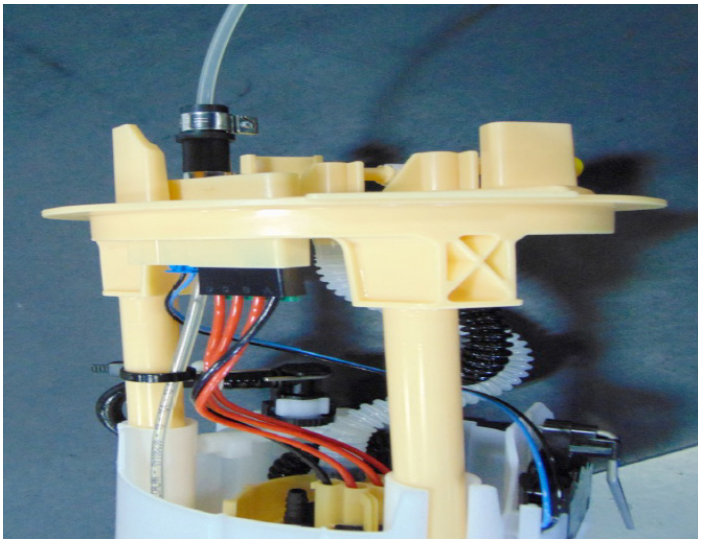

Fig. 3

Step 5
Fasten the connecting piece with the Ø 11 mm clamps at tank fitting. Fig.4

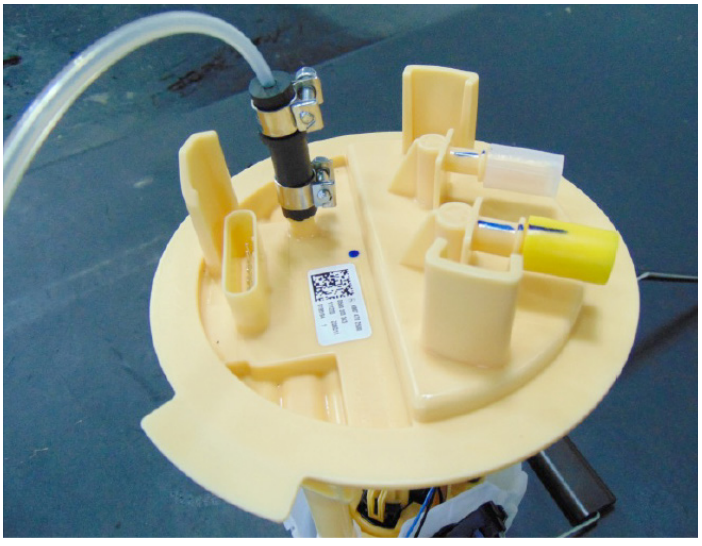

Fig. 4

Eberspaecher's full line of heating system can be used in many applications, such as trucks,buses, motorhomes, off-highway equipment and marine.
Contact your local dealer for more information.
A member of the Worldwide **Eberspächer** Group of Companies.

Eberspaecher Climate Control Systems
(800) 387-4800
(905) 670-0960
(905) 670-0728 Fax
help@eberspaecher-na.com
www.eberspaecher-na.com

Eberspächer

North America · 5580086 EN · 10/2021
Printed in Canada. Subject to change without notice.